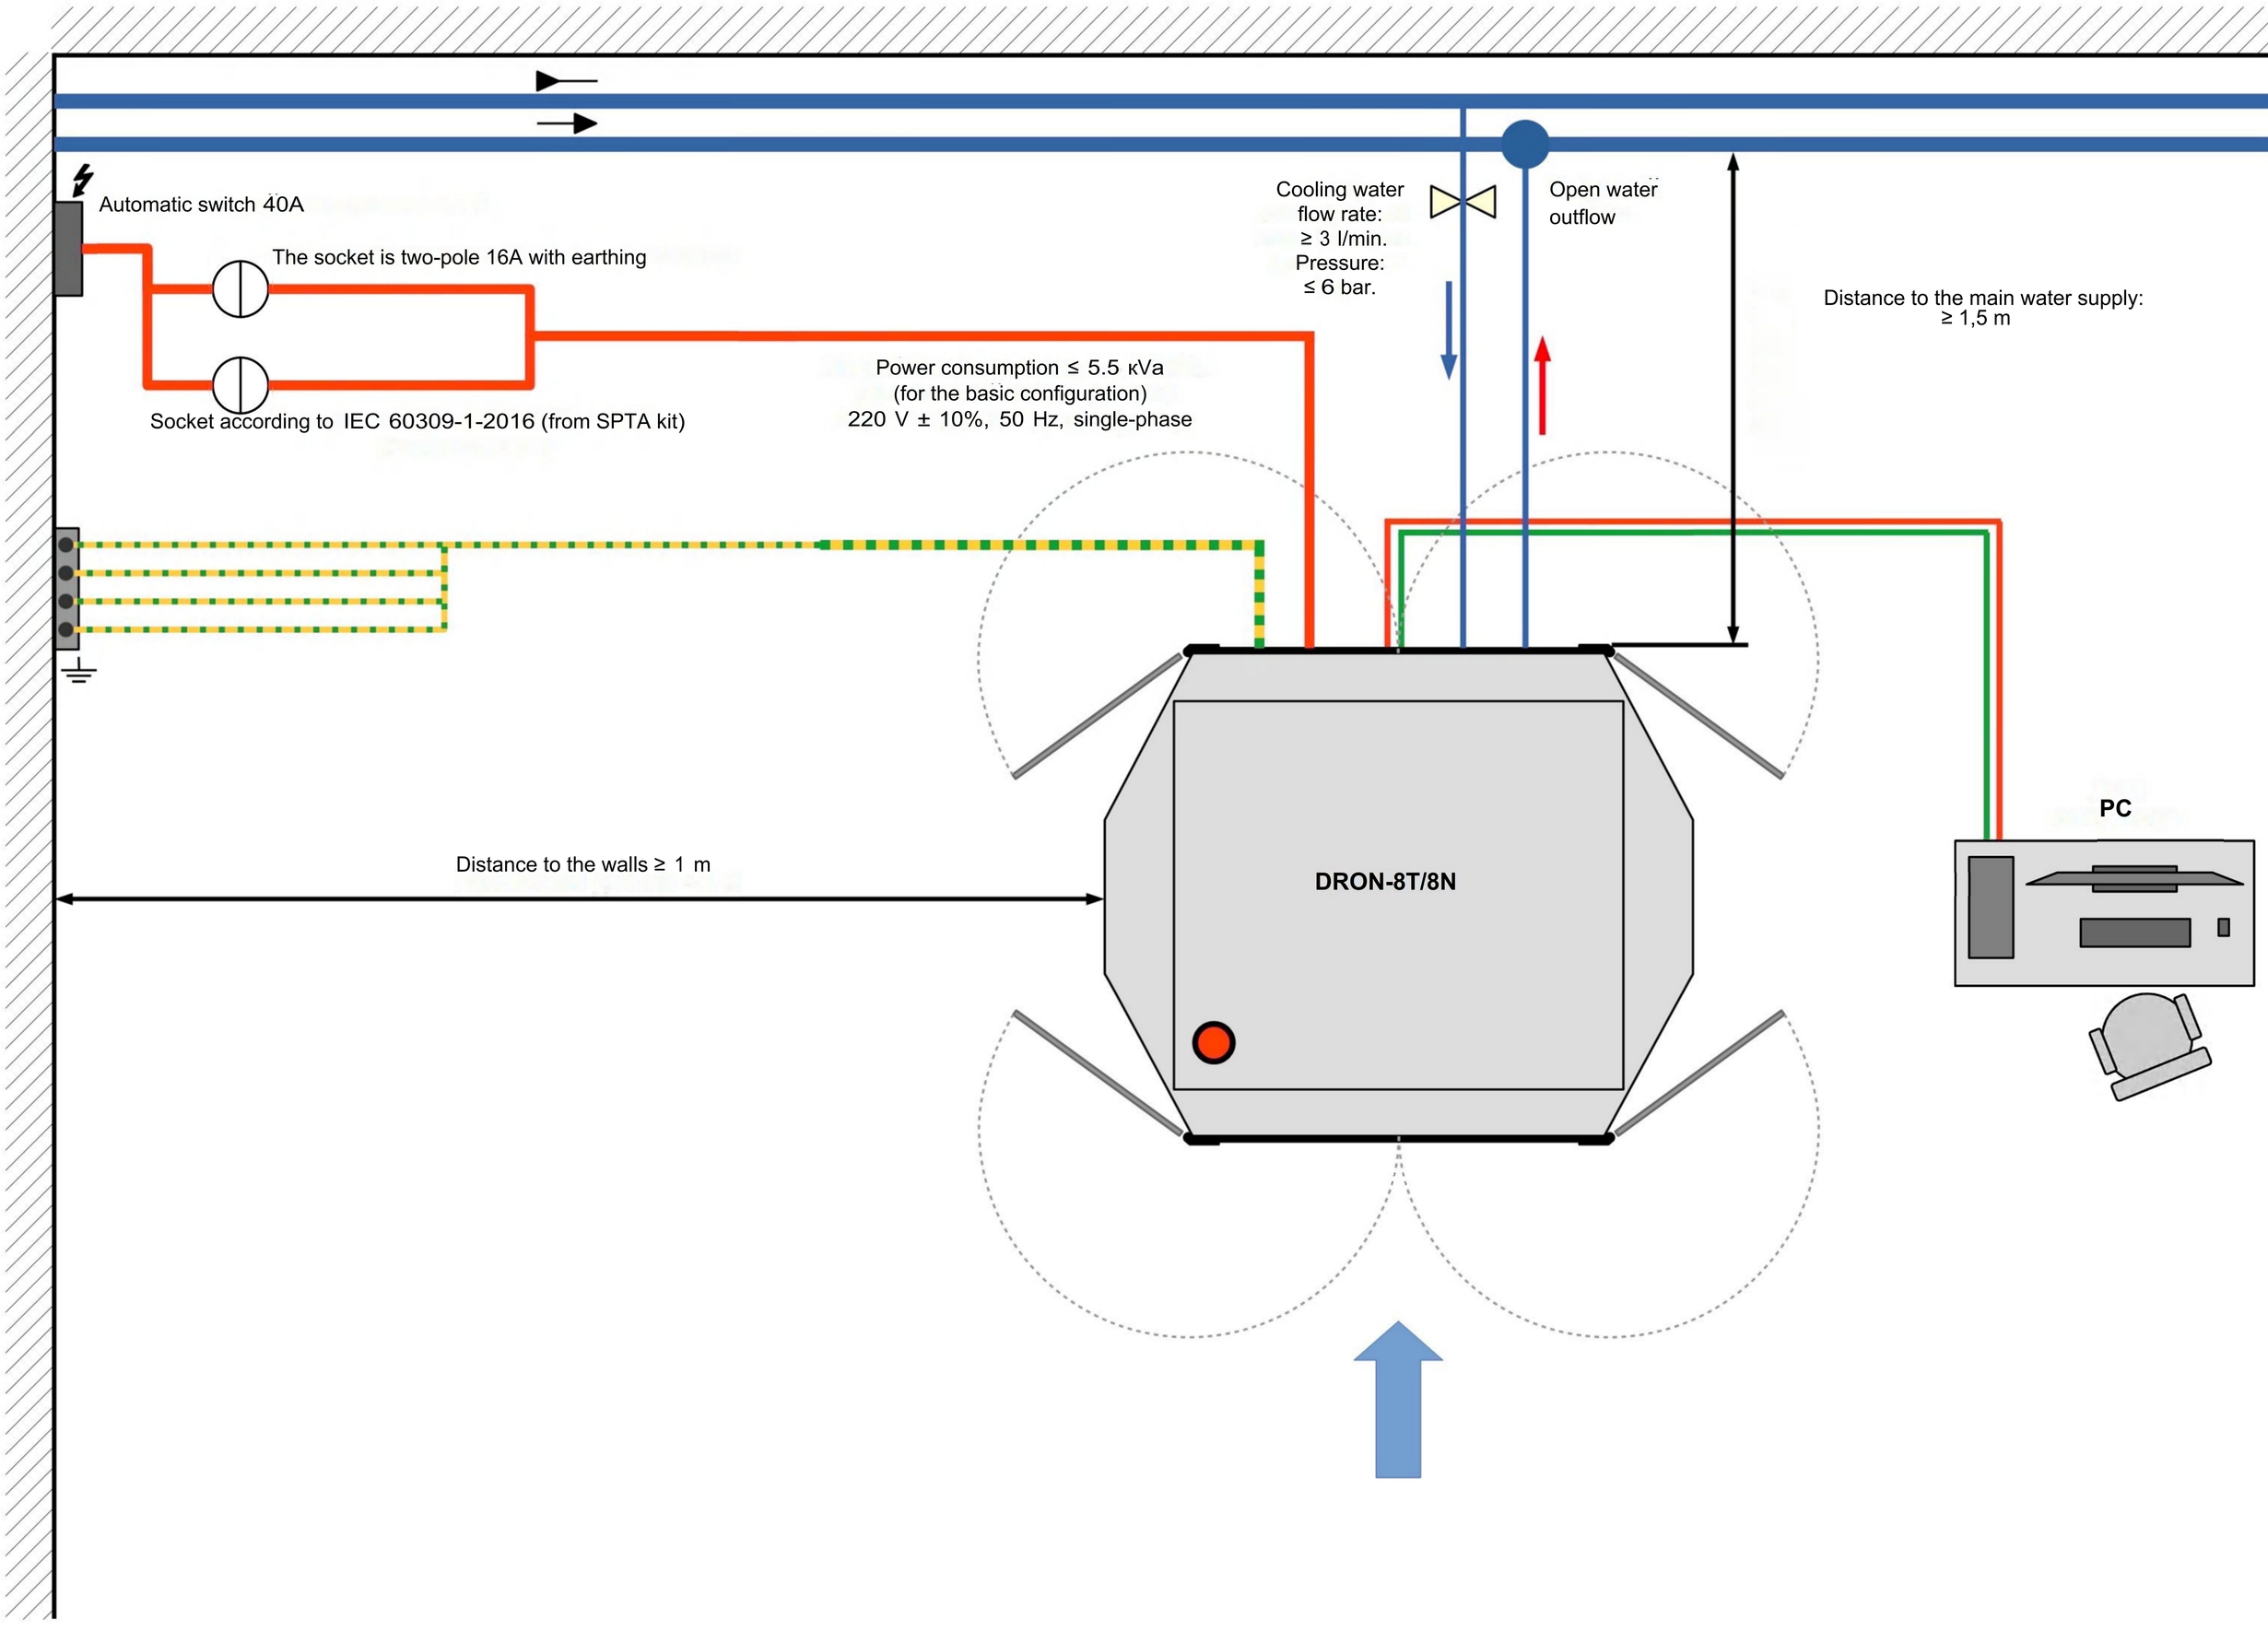
Automatic switch 40A
The socket is two-pole 16A with earthing
Socket according to IEC 60309-1-2016 (from SPTA kit)
Power consumption ≤ 5.5 κVa
(for the basic configuration)
220 V ± 10%, 50 Hz, single-phase
Cooling water
flow rate:
≥ 3 l/min.
Pressure:
≤ 6 bar.
Open water
outflow
Distance to the main water supply:
≥ 1,5 m
Distance to the walls ≥ 1 m
DRON-8T/8N
PC